

Professional Box Camera



KC-C3800/KB-C1380

Features

- Day & Night Function
- Built-in AGC
- Built-in BLC
- Built-in AWB

KC-C3800



1/4" SHARP Super Color CCD
420TVL 0.8 Lux

KB-C1380

1/3" A1 B/W CCD
420TVL 0.05 Lux



Rear view

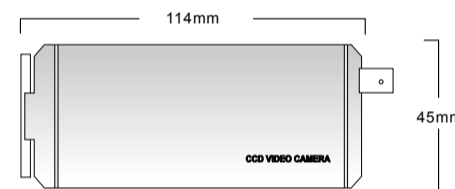

Weight: 183g

SPECIFICATIONS

SPECIFICATIONS	C SERIES			
	KB-C3800		KB-C1380	
MODEL NO.				
TV SYSTEM	NTSC	PAL	EIA	CCIR
IMAGE SENSOR	1/4" Sharp Super CCD	●	1/3-inch CCD	●
DSP	Sharp	●	A1	●
CCD TOTAL PIXELS	512 (H) X492 (V)	542 (H) X582 (V)	537 (H) X505 (V)	537 (H) X597 (V)
SCANNING SYSTEM	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec
SYNC SYSTEM	Internal	●	Internal	●
MINIMUM ILLUMINATION	0.8 Lux F1.2	0.8 Lux F1.2	0.05 Lux F1.2	0.05 Lux F1.2
RESOLUTION	420 TV Line	420 TV Line	380 TV Line	380 TV Line
WHITE BALANCE	ATW / AWC Switchable	●		
GAIN CONTROL	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●
S / N RATIO	48dB (AGC OFF)	●	48dB (AGC OFF)	●
ELECTRONIC SHUTTER	1/60~1/120,000 sec.	1/50~1/120,000 sec.	1/60~1/120,000 sec.	1/50~1/120,000 sec.
AUTO IRIS	VIDEO / DC	●	VIDEO / DC	●
LENS MOUNT	C/CS	●	C/CS	●
B.L.C. FUNCTION	ON / OFF switchable	●	ON / OFF switchable	●
MIRROR FUNCTION	ON / OFF switchable	●		●
AUDIO OUTPUT				
VIDEO OUTPUT	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●
GAMMA CORRECTION	0.45	●	0.45	●
OPERATION TEMPERATURE	-10°C TO 50°C	●	-10°C TO 50°C	●
OPERATIONAL HUMIDITY	within 85%RH	●	within 85%RH	●
POWER SUPPLY	DC12V±1V / 150mA	●	DC12V±1V / 150mA	●
DIMENSIONS(L X W X H)	114X45X45	●		●
WEIGHT	185g	●		●