




KC-748/742/740



Rear view

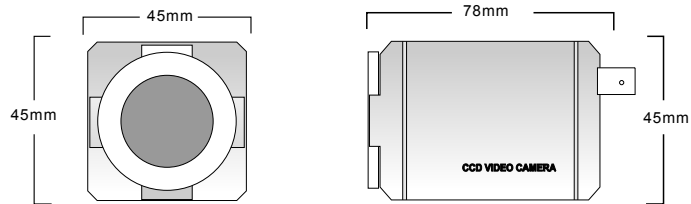

Weight:165g

C7 Professional Box Camera

Features

- Day & Night Function
- Easy-to-install mechanism
- Compact and Beautiful design
- Easy access to lens for exchange

KC-748

1/3" Sony Super HAD Color CCD
High resolution 480TVL 0.8 Lux

KC-742

1/3" Sony Super HAD Color CCD
Normal resolution 420TVL 0.5Lux

KC-740

1/3" SHARP HAD Color CCD
Normal resolution 420TVL 0.8 Lux



SPECIFICATIONS

SPECIFICATIONS	C7 SERIES					
	KC-748		KC-742		KC-740	
MODEL NO.	NTSC	PAL	NTSC	PAL	NTSC	PAL
TV SYSTEM	NTSC	PAL	NTSC	PAL	NTSC	PAL
IMAGE SENSOR	1/3"Sony Super HAD CCD	●	1/3"Sony Super HAD CCD	●	1/3"Sharp Super CCD	●
DSP	Sony	●	Sony	●	Sharp	●
CCD TOTAL PIXELS	811 (H)X 508 (V)	795 (H)X596 (V)	537 (H)X 505 (V)	537 (H) X597 (V)	512 (H) X492 (V)	542 (H) X582 (V)
SCANNING SYSTEM	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec
SYNC SYSTEM	Internal	●	Internal	●	Internal	●
MINIMUM ILLUMINATION	0.8 Lux F1.2	0.8 Lux F1.2	0.5 Lux F1.2	0.5 Lux F1.2	0.8 Lux F1.2	0.8 Lux F1.2
RESOLUTION	480 TV Line	480 TV Line	420 TV Line	420 TV Line	420 TV Line	420 TV Line
WHITE BALANCE	ATW / AWC Switchable	●	ATW / AWC Switchable	●	ATW / AWC Switchable	●
GAIN CONTROL	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●
S / N RATIO	48dB (AGC OFF)	●	48dB (AGC OFF)	●	48dB (AGC OFF)	●
ELECTRONIC SHUTTER	1/60~1/120,000 sec.	1/50~1/120,000 sec.	1/60~1/120,000 sec.	1/50~1/120,000 sec.	1/60~1/120,000 sec.	1/50~1/120,000 sec.
AUTO IRIS	VIDEO / DC	●	VIDEO / DC	●	VIDEO / DC	●
LENS MOUNT	C/CS	●	C/CS	●	C/CS	●
B.L.C. FUNCTION	ON / OFF switchable	●	ON / OFF switchable	●	ON / OFF switchable	●
MIRROR FUNCTION					ON / OFF switchable	●
AUDIO OUTPUT						
VIDEO OUTPUT	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●
GAMMA CORRECTION	0.45	●	0.45	●	0.45	●
OPERATION TEMPERATURE	-10℃ TO 50℃	●	-10℃ TO 50℃	●	-10℃ TO 50℃	●
OPERATIONAL HUMIDITY	within 85%RH	●	within 85%RH	●	within 85%RH	●
POWER SUPPLY	DC12V±1V / 180mA	●	DC12V±1V / 150mA	●	DC12V±1V / 150mA	●
DIMENSIONS(ΦL X H)	78X45X45	●	●	●	●	●
WEIGHT	168g	●	●	●	●	●