


Professional dome camera



KC-EV3145/EV3150

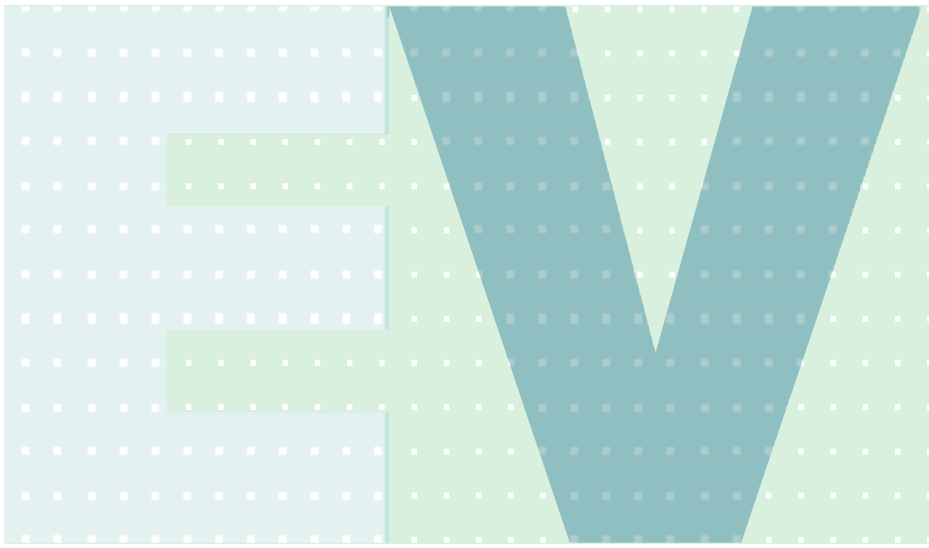

Microphone





Vari-focal Lens



Strong Power Tolerance



AC 24V / DC12V

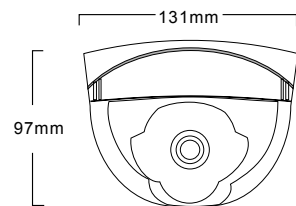

Weight:380g

Features

- Built-in Vari-focal Lens 3.5 - 8mm (4 - 9mm Optional)
- AGC, BLC, Flickerless On/Off, Auto White Balance
- AC 24V/DC 12V Dual Voltage (Optional)
- Built-in mini microphone (Optional)
- Audio output covered 10M (Optional)

KC-EV3150 1/3" SONY Ex-view HAD Color CCD 500TVL 0.3Lux

KC-EV3145 1/3" SONY Super HAD Color CCD 450TVL 0.5Lux



SPECIFICATIONS

SPECIFICATIONS	EV SERIES			
	KC-EV3150E		KC-EV3145	
MODEL NO.	NTSC	PAL	NTSC	PAL
TV SYSTEM				
IMAGE SENSOR	1/3"SONY ExView HAD CCD	●	1/3"SONY Super HAD CCD	●
DSP	Sony	●	Sony	●
CCD TOTAL PIXELS	811 (H)x508 (V)	795 (H)x596 (V)	537 (H)x505 (V)	537 (H)x597 (V)
SCANNING SYSTEM	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec
SYNC SYSTEM	Internal	●	Internal	●
MINIMUM ILLUMINATION	0.3 Lux F1.2	0.3 Lux F1.2	0.5 Lux F1.2	0.5 Lux F1.2
RESOLUTION	500 TV Line	500 TV Line	450 TV Line	420 TV Line
WHITE BALANCE	ATW / AWC Switchable	●	ATW / AWC Switchable	●
GAIN CONTROL	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●
S / N RATIO	48dB (AGC OFF)	●	48dB (AGC OFF)	●
ELECTRONIC SHUTTER	1/60~1/120,000 sec.	1/50~1/120,000 sec.	1/60~1/120,000 sec.	1/50~1/120,000 sec.
LENS MOUNT	Vair-focal Lens	●	Vair-focal Lens	●
B.L.C. FUNCTION	ON / OFF switchable	●	ON / OFF switchable	●
MIRROR FUNCTION				
VIDEO OUTPUT	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●
GAMMA CORRECTION	0.45	●	0.45	●
OPERATION TEMPERATURE	-10°C TO 50°C	●	-10°C TO 50°C	●
OPERATIONAL HUMIDITY	within 85%RH	●	within 85%RH	●
POWER SUPPLY	DC12V±1V / 180mA	●	DC12V±1V / 150mA	●
DIMENSIONS(φx H)	132X100	●	132X100	●
WEIGHT-NET	380g	●	380g	●