

Armor Dome Camera

JB

KC-ES3142/ES3140/ES4140




Features

- Robust metal Armor Housing
- Aluminum ring
- Easy Install mechanism
- Compact and Beautiful design
- Easy access to lens for exchange
- 940~850nm IR sensitive



- KC-JB3142** 1/3" SONY Super HAD Color CCD 420TVL 0.5Lux
- KC-JB3140** 1/3" SHARP Super Color CCD 420TVL 0.8Lux
- KC-JB4140** 1/4" SHARP Super Color CCD 420TVL 0.8Lux

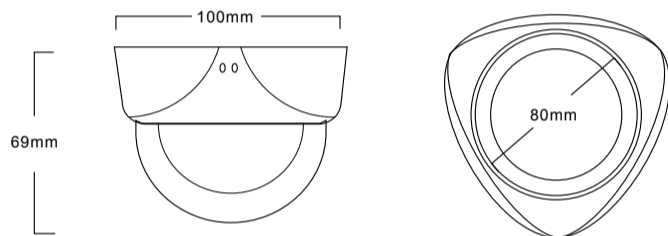

Weight: 390g



SPECIFICATIONS

Riot Armor Dome Camera

SPECIFICATIONS	JB SERIES					
	KC-JB3142		KC-JB3140		KC-JB4140	
MODEL NO.						
TV SYSTEM	NTSC	PAL	NTSC	PAL	NTSC	PAL
IMAGE SENSOR	1/3"SONY Super HAD CCD	●	1/3"Sharp Super CCD	●	1/4"Sharp Super CCD	●
DSP	Sony	●	Sharp	●	Sharp	●
CCD TOTAL PIXELS	537 (H) x505 (V)	537 (H) x 597 (V)	542 (H) x492 (V)	512 (H) x582 (V)	542 (H)x492 (V)	512 (H) x582 (V)
SCANNING SYSTEM	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec
SYNC SYSTEM	Internal	●	Internal	●	Internal	●
MINIMUM ILLUMINATION	0.5 Lux F1.2	0.5 Lux F1.2	0.8 Lux F1.2	0.8 Lux F1.2	0.8 Lux F1.2	0.8 Lux F1.2
RESOLUTION	420 TV Line	420 TV Line	420 TV Line	420 TV Line	420 TV Line	420 TV Line
WHITE BALANCE	ATW / AWC Switchable	●	ATW / AWC Switchable	●	ATW / AWC Switchable	●
GAIN CONTROL	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●
S / N RATIO	48dB (AGC OFF)	●	48dB (AGC OFF)	●	48dB (AGC OFF)	●
ELECTRONIC SHUTTER	1/60~1/100,000 sec.	1/50~1/100,000 sec.	1/60~1/100,000 sec.	1/50~1/100,000 sec.	1/60~1/100,000 sec.	1/50~1/100,000 sec.
AUTO IRIS						
LENS MOUNT	Board Lens Mount	●	Board Lens Mount	●	Board Lens Mount	●
B.L.C. FUNCTION	ON / OFF switchable	●	ON / OFF switchable	●	ON / OFF switchable	●
MIRROR FUNCTION			ON / OFF switchable	●	ON / OFF switchable	●
VIDEO OUTPUT	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●
GAMMA CORRECTION	0.45	●	0.45	●	0.45	●
OPERATION TEMPERATURE	-10℃ TO 50℃	●	-10℃ TO 50℃	●	-10℃ TO 50℃	●
OPERATIONAL HUMIDITY	within 85% RH	●	within 85% RH	●	within 85% RH	●
POWER SUPPLY	DC12V±1V / 150mA	●	DC12V±1V / 150mA	●	DC12V±1V / 150mA	●
DIMENSIONS(L x W x H)	φ 100X69	●	φ 100X69	●	φ 100X69	●
WEIGHT-NET	550g	●	550g	●	550g	●