


# Riot Armor Dome Camera



KC-JD3148/JD4140

## Features

- Robust metal Armor Housing Aluminum ring
- Easy Install mechanism
- Compact and Beautiful design
- Easy access to lens for exchange
- Surge power protection built-in
- Dual power with Non-polarity input

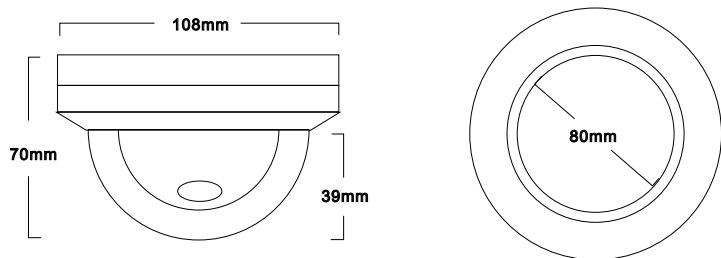

Weight:800g

**KC-JD 3148**  
1/3" SONY Super HAD Color CCD 480TVL 0.8Lux

**KC-JD 4140**  
1/4" SHARP Super Color CCD 420TVL 0.8Lux



## SPECIFICATIONS

## Riot Armor Dome Camera

SPECIFICATIONS	JD SERIES			
	KC-JD3148		KC-JD4140	
MODEL NO.				
TV SYSTEM	NTSC	PAL	NTSC	PAL
IMAGE SENSOR	1/3"SONY Super HAD CCD	●	1/4"SHARP Super CCD	●
DSP	Sony	●	Sharp	●
CCD TOTAL PIXELS	811 (H) x508 (V)	795 (H) x 596 (V)	542 (H)x492 (V)	512 (H) x582 (V)
SCANNING SYSTEM	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec
SYNC SYSTEM	Internal	●	Internal	●
MINIMUM ILLUMINATION	0.8 Lux F1.2	0.8 Lux F1.2	0.8 Lux F1.2	0.8 Lux F1.2
RESOLUTION	480 TV Line	480 TV Line	420 TV Line	420 TV Line
WHITE BALANCE	ATW / AWC Switchable	●	ATW / AWC Switchable	●
GAIN CONTROL	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●
S / N RATIO	48dB (AGC OFF)	●	48dB (AGC OFF)	●
ELECTRONIC SHUTTER	1/60~1/100,000 secretary.	1/50~1/100,000 sec.	1/60~1/100,000 sec.	1/50~1/100,000 sec.
AUTO IRIS		●	VIDEO / DC	●
LENS MOUNT	Board Lens Mount	●	C/CS	●
B.L.C. FUNCTION	ON / OFF switchable	●	ON / OFF switchable	●
MIRROR FUNCTION			ON / OFF switchable	●
VIDEO OUTPUT	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●
GAMMA CORRECTION	0.45	●	0.45	●
OPERATION TEMPERATURE	-10℃ TO 50℃	●	-10℃ TO 50℃	●
OPERATIONAL HUMIDITY	within 85% RH	●	within 85% RH	●
POWER SUPPLY	DC12V±1V / 180mA	●	DC12V±1V / 150mA	●
DIMENSIONS(φ X H)	108X70	●	108X70	●
WEIGHT-NET	800g	●	800g	●