


Professional dome camera



KC-T933/T913 / KB-T942

Features

- Robust Plastic Armor Housing
- Aluminum ring
- Easy Install mechanism
- Compact and Beautiful Design
- Easy access to lens for exchange

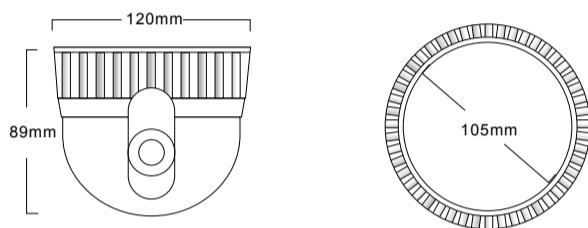

Weight:400g



KC-T933 1/3" SONY Super HAD Color CCD 420TVL 0.5Lux

KC-T913 1/3" SHARP Super Color CCD 420TVL 0.8Lux

KB-T942 1/3" SONY Super HAD B/W CCD 420TVL 0.05Lux

SPECIFICATIONS

Professional Dome Camera

SPECIFICATIONS	T SERIES					
	KC-T933		KC-T913		KB-T942	
MODEL NO.						
TV SYSTEM	NTSC	PAL	NTSC	PAL	EIA	CCIR
IMAGE SENSOR	1/3" Sony Super HAD CCD	●	1/3" Sharp Super CCD	●	1/3" Sony Super HAD CCD	●
DSP	Sony	●	Sharp	●	Sony	●
CCD TOTAL PIXELS	537 (H) x505 (V)	537 (H) X 597 (V)	542 (H) x492 (V)	512 (H) x582 (V)	537 (H) X 505 (V)	537 (H) x 597 (V)
SCANNING SYSTEM	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec
SYNC SYSTEM	Internal	●	Internal	●	Internal	●
MINIMUM ILLUMINATION	0.5 Lux F1.2	0.5 Lux F1.2	0.8 Lux F1.2	0.8 Lux F1.2	0.05 Lux F1.2	0.05 Lux F1.2
RESOLUTION	420 TV Line	420 TV Line	420 TV Line	420 TV Line	420 TV Line	420 TV Line
WHITE BALANCE	ATW / AWC Switchable	●	ATW / AWC Switchable	●		
GAIN CONTROL	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●
S / N RATIO	48dB (AGC OFF)	●	48dB (AGC OFF)	●	48dB (AGC OFF)	●
ELECTRONIC SHUTTER	1/60~1/100,000 sec.	1/50~1/100,000 sec.	1/60~1/100,000 sec.	1/50~1/100,000 sec.	1/60~1/100,000 sec.	1/50~1/100,000 sec.
B.L.C. FUNCTION	ON / OFF switchable	●	ON / OFF switchable	●	ON / OFF switchable	●
MIRROR FUNCTION			ON / OFF switchable	●	ON / OFF switchable	●
VIDEO OUTPUT	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●
GAMMA CORRECTION	0.45	●	0.45	●	0.45	●
LENS	C/CS Mount/Vari-focal Lens	●	C/CS Mount/Vari-focal Lens	●	C/CS Mount/Vari-focal Lens	●
IR LED						
VISIBLE DISTANCE AT						
OPERATION TEMPERATURE	-10°C to 50°C		-10°C to 50°C	●	-10°C to 50°C	●
OPERATIONAL HUMIDITY	within 85% RH	●	within 85% RH	●	within 85% RH	●
POWER SUPPLY	DC12V±1V / 150mA	●	DC12V±1V / 150mA	●	DC12V±1V / 150mA	●
DIMENSIONS(ΦXH)	120X89	●	120X89	●	120X89	●
WEIGHT-NET	400g	●	400g	●	400g	●