

Color Bullet Camera

WVA



KC-WA3142/WA4140

Features



- Pinhole Camera
- Compact size and beauty design
- Easy installation

KC-WA3142

1/3" Sony Super HAD Color CCD
Normal resolution 420TV L 0.5Lux

KC-WA4142

1/4" Sony Super HAD Color CCD
Normal resolution 420TV L 0.5Lux

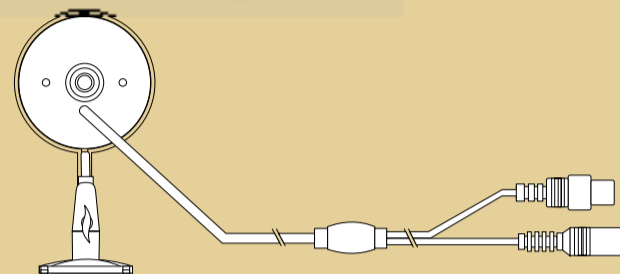

Dimensions (φ X L X H): 23 X 100 X 42 mm

Weight: 280g



Weight: 280g

KC-208SH

1/4" SONY Super HAD Color CCD
420TV L 0.5 Lux

KC-208

1/4" SHARP Super Color CCD
420TV L 0.8 Lux



Weight: 280g

KB-208S

1/3" SONY Super HAD B/W CCD
420TV L 0.05 Lux

KB-208L

1/3" A1 B/W CCD
420TV L 0.05 Lux

SPECIFICATIONS

SPECIFICATIONS	WA SERIES			
	KC-WA3142		KC-WA4142	
	NTSC	PAL	NTSC	PAL
MODEL NO.				
TV SYSTEM				
IMAGE SENSOR	1/3"Sony Super HAD CCD	●	1/4"Sony Super HAD CCD	●
DSP	Sony	●	Sony	●
CCD TOTAL PIXELS	537 (H) X505 (V)	537 (H) X597 (V)	537 (H) X 505 (V)	537 (H) X597 (V)
SCANNING SYSTEM	525 lines, 60 fields/sec	625 lines, 50 fields/sec	525 lines, 60 fields/sec	625 lines, 50 fields/sec
SYNC SYSTEM	Internal	●	Internal	●
MINIMUM ILLUMINATION	0.5 Lux F1.2	0.5 Lux F1.2	0.5Lux F1.2	0.5 Lux F1.2
RESOLUTION	420 TV Line	420 TV Line	420 TV Line	420 TV Line
WHITE BALANCE	ATW / AWC Switchable	●	ATW / AWC Switchable	●
GAIN CONTROL	AGC ON / OFF switchable	●	AGC ON / OFF switchable	●
S / N RATIO?	48dB (AGC OFF)	●	48dB (AGC OFF)	●
ELECTRONIC SHUTTER	1/60~1/120,000 sec.	1/50~1/120,000 sec.	1/60~1/120,000 sec.	1/50~1/120,000 sec.
B.L.C. FUNCTION	ON / OFF switchable	●	ON / OFF switchable	●
MIRROR FUNCTION				
VIDEO OUTPUT	Composite 1.0V p-p at 75 ohm	●	Composite 1.0V p-p at 75 ohm	●
GAMMA CORRECTION	0.45	●	0.45	●
LENS	Pinhole 4..3mm	●	Pinhole 4..3mm	●
OPERATION TEMPERATURE	-10°C TO 50°C	●	-10°C TO 50°C	●
OPERATIONAL HUMIDITY	within 85%RH	●	within 85%RH	●
POWER SUPPLY	DC12V±1V / 150mA	●	DC12V±1V / 150mA	●
DIMENSIONS(φ X L X H)	23X100X42	●	23X100X42	●
WEIGHT-NET	280g	●	280g	●